


PM



polyester film-electrical insulation flexible fabric paper

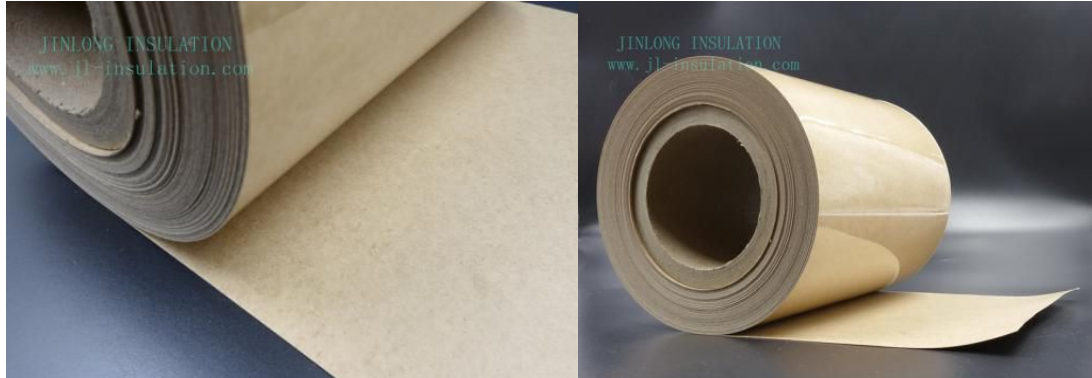

Composition:

PMP consists of polyester film, covered on one side with yellow electrical insulation board. The adhesive is acid-free and heat resistance.

Properties:

PMP shows excellent mechanical strength and electric insulating properties .

Applications:

PMP can be used for slots, layer and phase insulation for low voltage motor and electrical tools, or be used for interlayer insulation in transformers;

Store:

It can be stored indefinitely at (20°C , 50% r. h.)

Availability:

Rolls: Non-trimmed width is 1003mm~1005mm / Trimmed width is 990 mm

Sheets: From 990 mm to 1000 mm at any size

Tapes: From 5mm to 990mm

Roll diameter: about 300mm width

Core size: 76mm.

Changzhou Jinlong Insulation Material Co., Ltd

Tel: 0086-519-86781991

Fax: 0086-519-86781081

NO. 8, Xinkang Road, Zhonglou Zone, Changzhou City, Jiangsu, China

Web: www.jl-insulation.com

Email: steven@jl-insulation.com

PM Technical Data



PM properties	Unit	Value				
Products Name		PM (1.5/7)	PM(2/7)	PM(3/4)	PM(2/6)	PM(2/10)
Thickness	mm	0.22	0.23	0.18	0.20	0.30
Thickness Tolerance	mm	±0.025	±0.03	±0.025	±0.03	±0.03
Nominal Grammage and Tolerance	g/m ²	260±26	275±40	210±21	250±38	370±55
Nominal Grammage and Tolerance	mm	0.038	0.05	0.075	0.05	0.05
Tensile Strength						
MD	N/10mm	≥125	≥135	≥100	≥120	≥200
TD	N/10mm	≥90	≥90	≥90	≥90	≥105
Elongation						
MD	KV	≥7	≥8	≥9	≥8	≥8
TD						
Bond Strength at 25 degree C		No delamination				
Thermal Rating		B class				
Color		Yellow				

Notice: @Nomimal grammage and Tolerance can be carried out in different proportion according to the practical requirement.

Changzhou Jinlong Insulation Material Co.,Ltd

Tel : 0086-519-86781991

Fax : 0086-519-86781081

Add:NO.8,Xinkang Road,Zhonglou Zone,Changzhou City,Jiangsu,China

Web : www.jl-insulation.com

Email : steven@jl-insulation.com

